


## Standardverschraubungen »value line«

- Messing vernickelt -

Für Luft, Wasser, Dampf, Öl etc.

max. Betriebsdruck: 60,0 bar  
 max. Betriebstemperatur: 150 °C

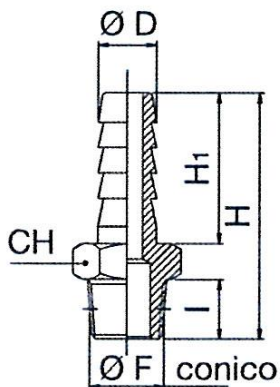

239.107-E

### Einschraubschlauchtüllen, Außengewinde konisch

Artikel Nr.	Ident Nr.	D	F	I	H	H1	CH
239.101-E	115587	6,0	R 1/8	8,0	31,5	19,0	12
239.102-E	115588	8,0	R 1/8	8,0	31,5	19,0	12
239.103-E	115589	9,0	R 1/8	8,0	31,5	19,0	12
239.104-E	115590	10,0	R 1/8	8,0	32,5	20,0	12
239.105-E	115591	6,0	R 1/4	11,0	35,0	19,0	14
239.106-E	115592	8,0	R 1/4	11,0	35,0	19,0	14
239.107-E	115593	9,0	R 1/4	11,0	35,0	19,0	14
239.108-E	115594	10,0	R 1/4	11,0	36,0	20,0	14
239.109-E	115595	12,0	R 1/4	11,0	36,0	20,0	14
239.110-E	115596	9,0	R 3/8	11,5	35,5	19,0	17
239.111-E	115597	10,0	R 3/8	11,5	36,5	20,0	17
239.112-E	115598	12,0	R 3/8	11,5	36,5	20,0	17
239.113-E	115599	9,0	R 1/2	14,0	38,5	19,0	22
239.114-E	115600	10,0	R 1/2	14,0	39,5	20,0	22
239.115-E	115601	12,0	R 1/2	14,0	39,5	20,0	22