


Standardverschraubungen »value line«

- Messing vernickelt -

Für Luft, Wasser, Dampf, Öl etc.

max. Betriebsdruck: 60,0 bar
 max. Betriebstemperatur: 150 °C

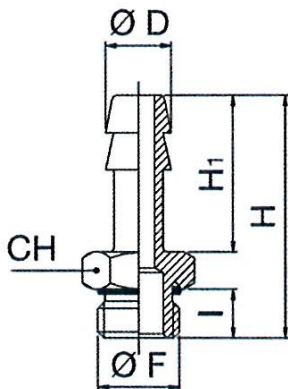

239.515-E

Einschraubschlauchtüllen, inkl. NBR-O-Ring, Außengewinde zylindrisch

Artikel Nr.	Ident Nr.	D	F	I	H	H1	CH
239.501-E	115602	6,0	G 1/8	6,5	30,0	19,0	14
239.502-E	115603	8,0	G 1/8	6,5	30,0	19,0	14
239.503-E	115604	9,0	G 1/8	6,5	30,0	19,0	14
239.505-E	115605	6,0	G 1/4	8,0	32,0	19,0	17
239.507-E	115606	9,0	G 1/4	8,0	32,0	19,0	17
239.509-E	115607	12,0	G 1/4	8,0	33,0	20,0	17
239.510-E	115608	9,0	G 3/8	9,0	33,0	19,0	20
239.512-E	115609	12,0	G 3/8	9,0	34,0	20,0	20
239.515-E	115610	12,0	G 1/2	10,0	35,5	20,0	24